

549 276
Rec'd PCT/PTO 16 SEP 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/549876




(43) International Publication Date
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number
WO 2004/084751 A2

- (51) International Patent Classification⁷: A61B 19/00 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/US2004/007327 (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (22) International Filing Date: 10 March 2004 (10.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/456,755 21 March 2003 (21.03.2003) US
- (71) Applicant (for all designated States except US): SCHAERER MAYFIELD USA, INC. [US/US]; 4900 Charlemar Drive, Cincinnati, OH 45227 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): EASTON, Kevin, R. [US/US]; 8070 Ashgrove Drive, Cincinnati, OH 45244 (US).
- (74) Agents: EBY, Richard, C. et al.; Wood, Herron & Evans, L.L.P., 2700 Carew Tower, Cincinnati, OH 45202 (US).
- (54) Title: SWIVEL ADAPTER AND BASE UNIT HANDLE

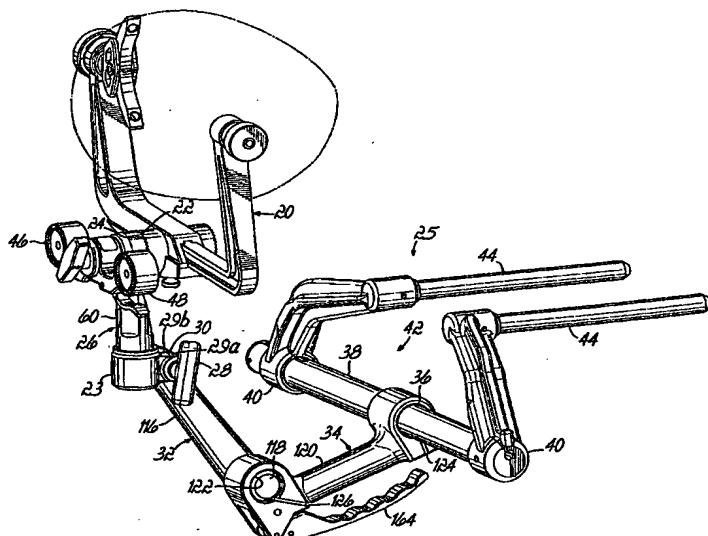

WO 2004/084751 A2

- (57) Abstract: A swivel adapter (26) has a base (60) with an outward facing first side (57) and a pivot surface (55) extending from the first side. A center adapter (52) is mounted for pivoting motion on the pivot surface and has an outward facing first device connector (46). A clamp (78) has a clamp operator (80) operable to clamp the center adapter on the pivot surface at a desired orientation with respect to the base. A base unit handle (34) has a clamping mechanism (128, 138, 156, 164) connected to a body (120) having two split bores (36, 122), which is operable to clamp and unclamp the split bores on respective shafts. The clamping mechanism has linkage (138, 156) connected to a closing handle (164) to provide a mechanical advantage to the handle during the clamping action.